

1 / 4

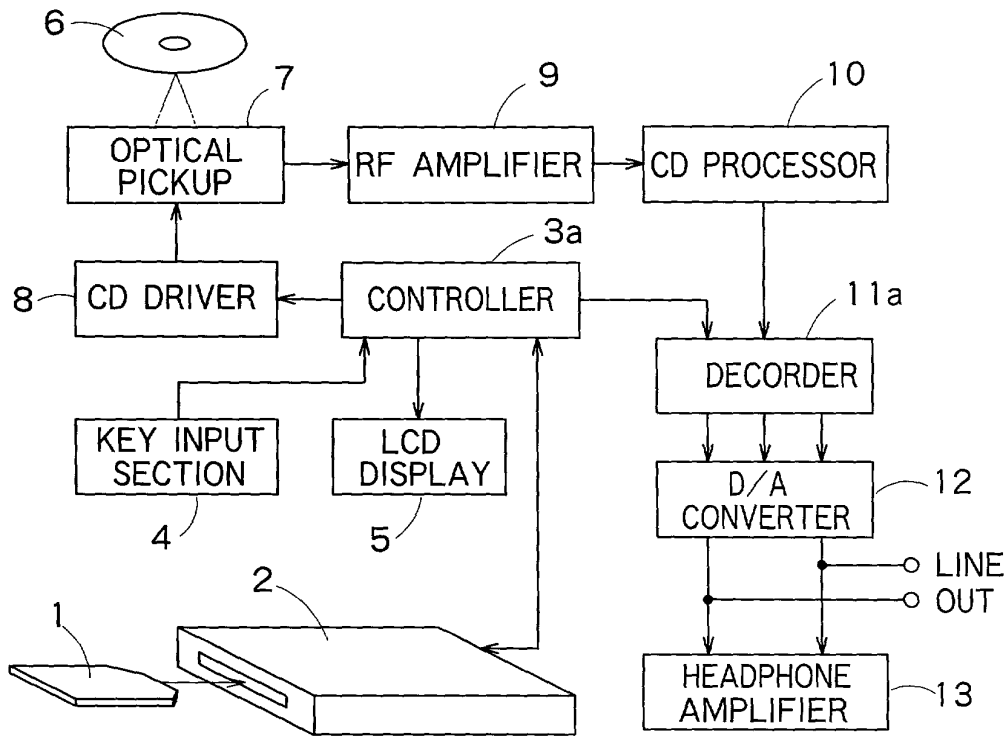


FIG. 1

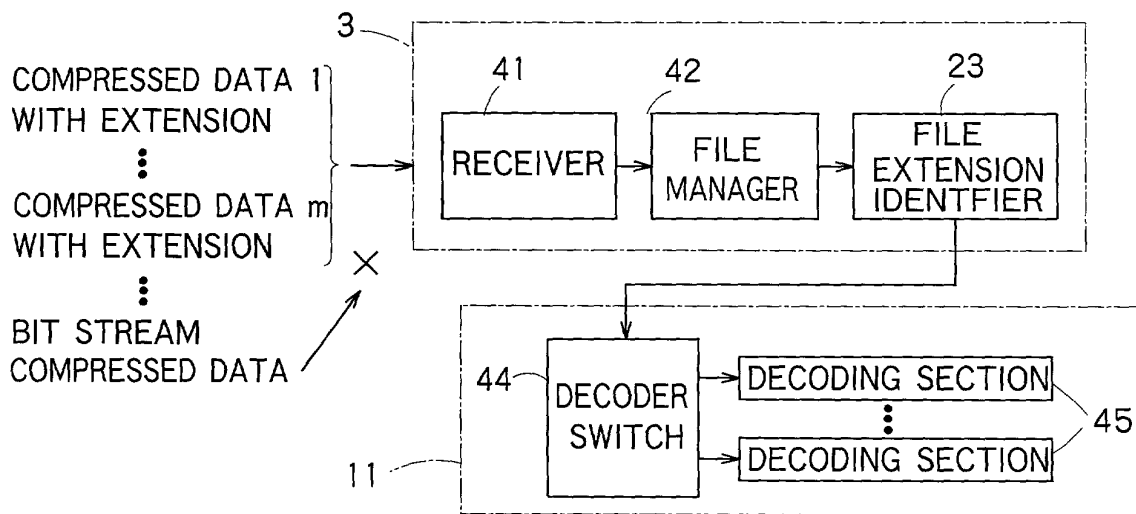


FIG. 2

2 / 4

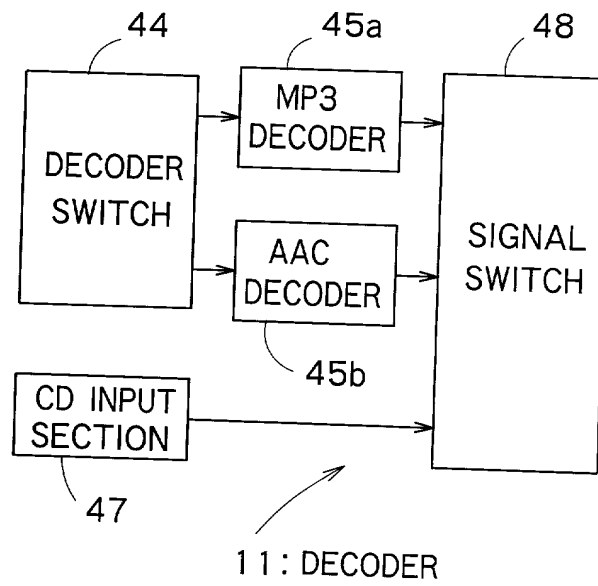


FIG. 3

3 / 4

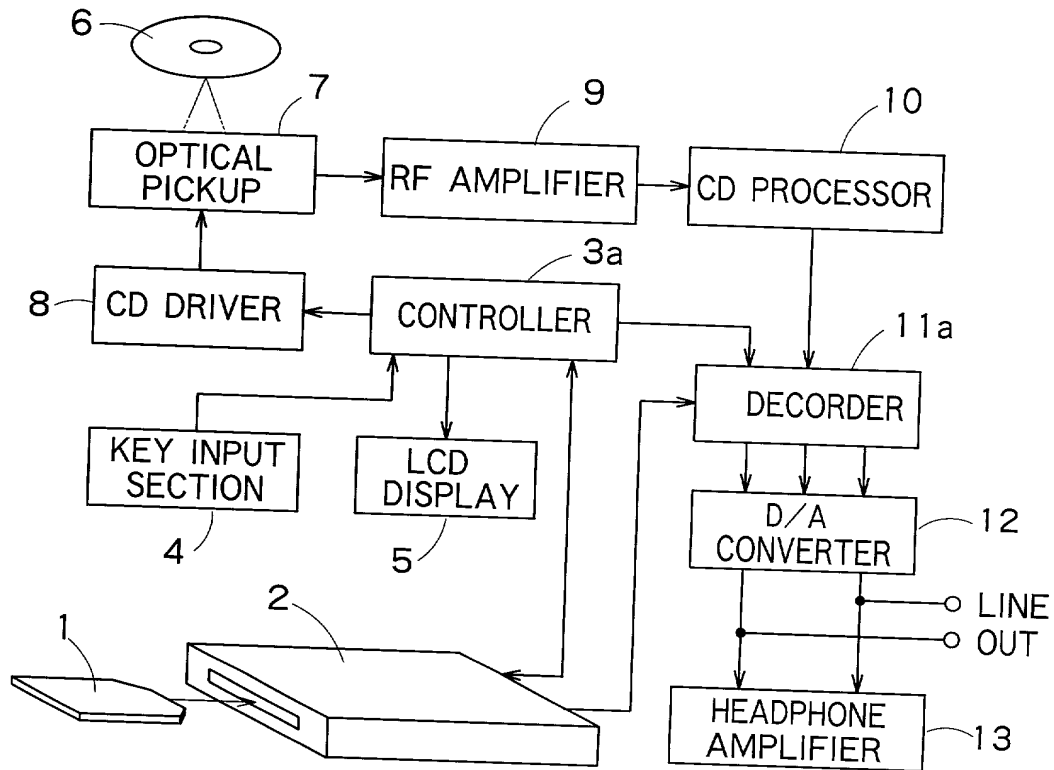


FIG. 4

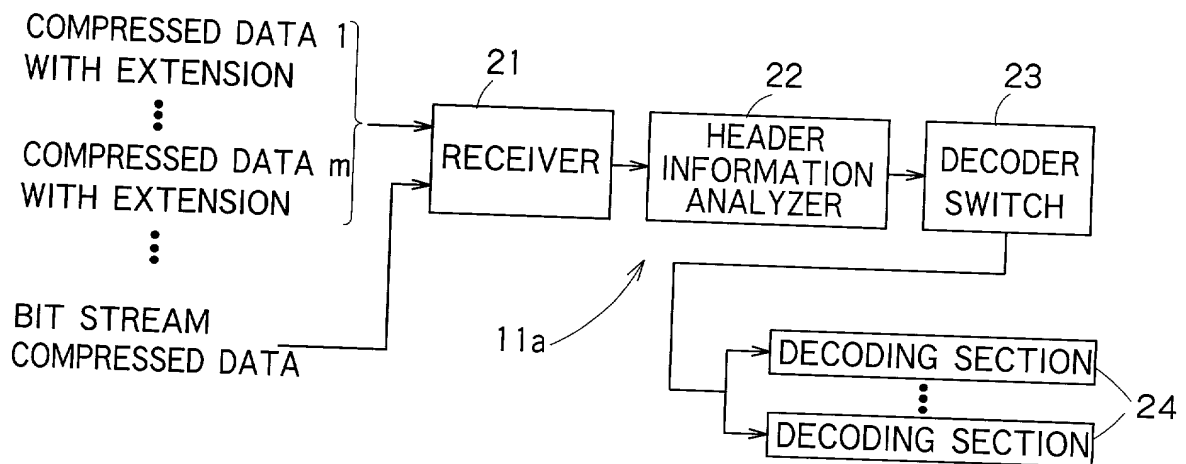


FIG. 5

4 / 4

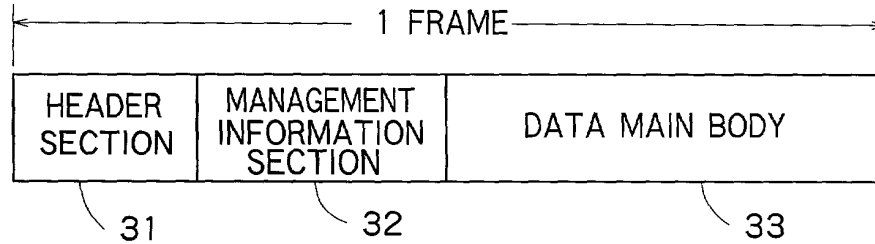


FIG. 6

CONTENTS OF HEADER

THE NUMBER OF BITS

USE		DEFINITION
ID	1	1:MPEG 1/Audio, 0:Reserved
LAYER	2	11:LAYER I, 10:LAYER II, 01:LAYER III, 00:Reserved
PROTECTION BIT	1	1:ERROR DETECTION INFORMATION NOT ADDED 0:THE SAME INFORMATION ADDED
BIT RATE	4	INDEX FOR DEFINING BIT RATE
SAMPLING FREQUENCY	2	11:Reserved, 10:32kHz, 00:44.1kHz
PADDING BIT	1	1:FRAME INCLUDING EXCESS SLOT 0:FRAME INCLUDING NO SLOT
USE BIT	1	UNUSED IN ISO/IEC
MODE	2	00:STEREO, 01:JOINT STEREO 10:DUAL STEREO, 10:SINGLE STEREO
MODE EXTENSION	2	SUB BAND FOR JOINT STEREO IN LAYER I / II, COMBINATION OF USED INTENSITY STEREO AND MS STEREO FOR LAYER
COPYRIGHT	1	1:COPYRIGHT PROTECTED, 0:NO COPYRIGHT
ORIGINAL/COPY DISTINCTION	1	1:ORIGINAL, 0:COPY
EMPHASIS	2	TYPE OF EMPHASIS TO BE USED

FIG. 7